


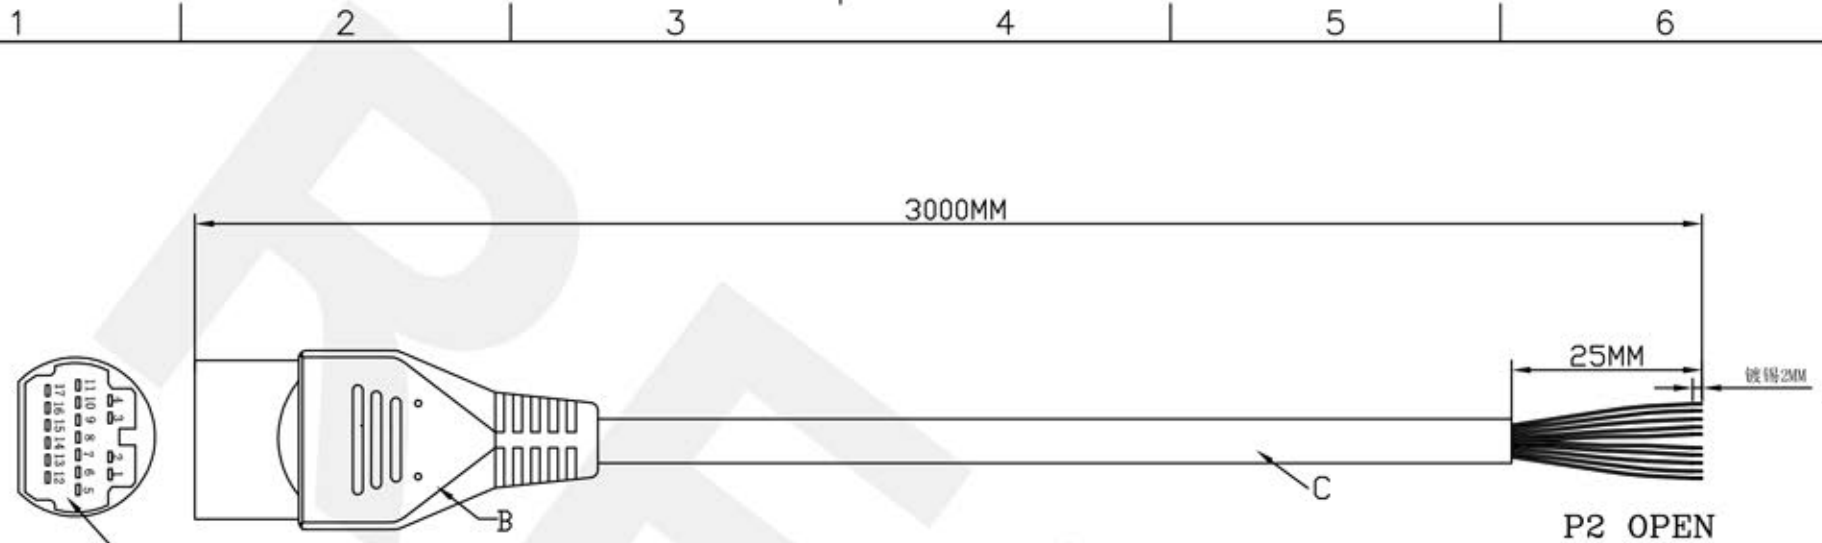

PIN ASSIGNMENT	
P1 MAZDA	P2 OPEN
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	

绕线方式:绕圈

包装方式:1PCS/PE

测试要求:

- 1.100%测试OK: 不能有短路、错位、断线、绝缘不良
- 2.导通阻抗: 5 OHM
- 3.绝缘阻抗: 5M OHM
- 4.高压: 300V DC

ROHS

C	CABLE:OD=6.8MM 17C 26AWG BLACK(外被要软) 过粉 印字2464	3000	MM	
B	MAZDA 17P OVERMOLD: 25P PVC 黑色	25	G	纸箱: 46.5*31.5*32.5CM /A3B
A	MAZDA 17P (PCB板+4号0.6厚磷铜针)	1	PCS	PE封口袋: 18*20CM /厚: 0.05 MM
ITEM	BILL OF MATERIAL /SPECIFICATION		QTY	UNIT
				包装材料清单

QUALITY SYMBOLS		CUSTOMER NO.	
▽#0	GENERAL TOLERANCES	PRODUCT NAME MAZDA 17P-OPEN	
	X ±0.1		
	X ±0.2		
	XX ±0.5		
▽#0	ANGLE TOLERANCES	LZT DATE:2017/06/01	
	X ±0.1		
	X ±0.2		
	XX ±0.5		
	XXX ±1.0	UNIT: MM SHEET: 1/1	
		SIZE: A4 SCALE:1:1 REV: A/0	
		THIRD ANGLE PROJECTION	