


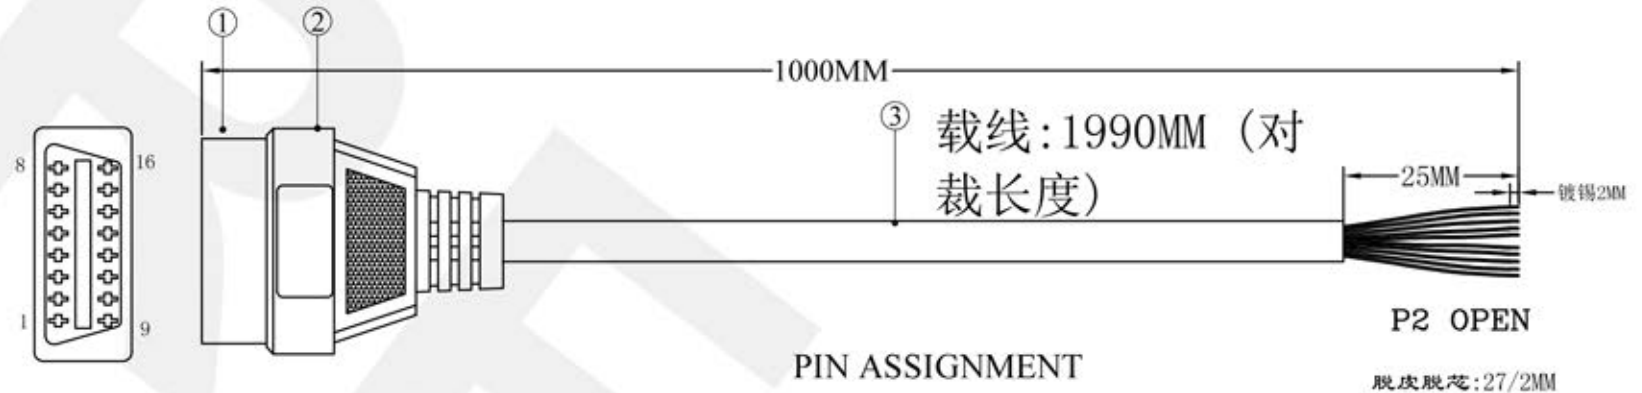

P1 OBDII FEMALE

脱皮脱芯:27/2MM
模具编号:410A/B

PIN ASSIGNMENT

P1 OBDII FEMALE P2 OPEN

1	_____
2	_____
3	_____
4	_____
5	_____
6	_____
7	_____
8	_____
9	_____
10	_____
11	_____
12	_____
13	_____
14	_____
15	_____
16	_____

包装方式:单独1条1PCS封口袋20*22MM,
箱子外面贴箱数 (跟单打印)

测试要求:

1. 100%测试OK: 不能有短路。错位。断线。绝缘不良
2. 导通阻抗: 5 OHM
3. 绝缘阻抗: 5M OHM
4. 高压: 300V DC

BILL OF MATERIAL

NO.	SPECIFICATION	Q'TY
⑥		1PCS
⑤		MM
④		30G
③	CABLE: OD=6.8 16C 26AWG 黑色 外被软	1SET
②	OVERMOLD:45P PVC 黑色	15G
①	OBDIIF黑色胶芯(CC033)磷铜针	1SET

QUALITY SYMBOLS	GENERAL TOLERANCES									
-0	X.	±---					Customer number	TITLE: OBDII F-OPEN(1M)		
	.X	±---								
	.XX	±1.27						PART NO.	ENG NO.	
	.XXX	±0.51								
C -0	ANGLE TOLERANCES		APPROVED BY	DATE		SIZE: A4		SCALE: 1:1	UNIT: mm	
	X°.	±1.0°.				 THIRD ANGLE PROJECTION				
	.X°	±---								
	.XX°	±---								
	.XXX°	---								