




包装方式:红边自封袋
箱子外面帖箱数 (跟单打印)

测试要求:

- 1. 100%测试OK: 不能有短路。 错位。 断线。 绝缘不良
- 2. 导通阻抗: 5 OHM
- 3. 绝缘阻抗: 5M OHM
- 4. 高压: 300V DC

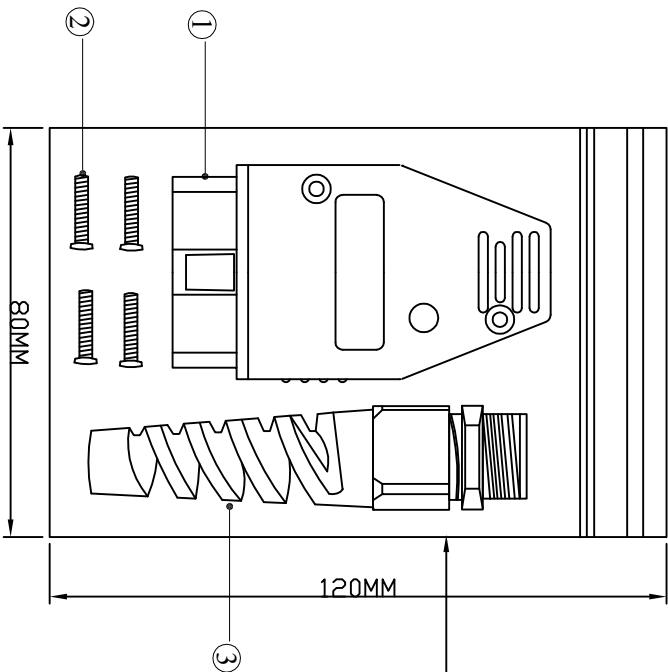

BILL OF MATERIAL		
⑥		1PCS
⑤		MM
④		1PCS
③	SR (外购)	1SET
②	螺丝*4PCS	
①	OBDII M(CC002 ABS原料+PC)绿色+短路PCB板+3号针*16PCS 磷铜 OBDII M 黑色外壳 (CC211)	1SET
SPECIFICATION		
NO.		Q'TY

QUALITY SYMBOLS		GENERAL TOLERANCES					
X.		±---		Customer number			
.X		±---					
.XX		±1.27					
.XXX		±0.51					
ANGLE TOLERANCES				TITLE: OBD 装置式 (绿色)			
X°		±10°					
.X°		±---					
.XX°		±---					
.XXX°		---		PART NO.			
APPROVED BY		DATE					
		SIZE:		SCALE:		UNIT:	
		A4		1:1		mm	
		THIRD ANGLE PROJECTION					