

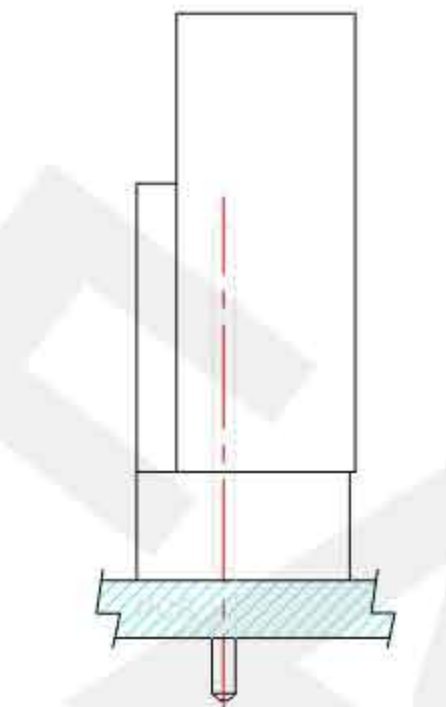


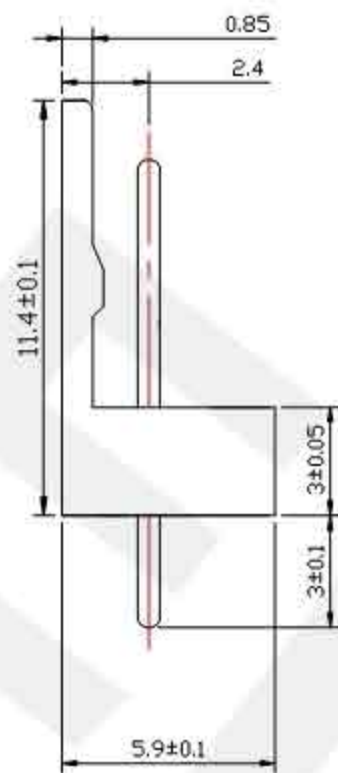

## ASSEMBLY LAYOUT

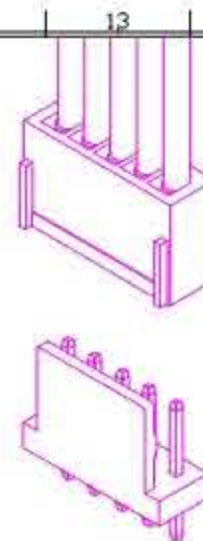

3D View

RoHS<sub>2.0</sub>

|       |       |     |
|-------|-------|-----|
| 50.8  | 48.26 | 20  |
| 25.40 | 22.86 | 10  |
| 22.86 | 20.32 | 9   |
| 20.32 | 17.78 | 8   |
| 17.78 | 15.24 | 7   |
| 15.24 | 12.70 | 6   |
| 12.70 | 10.16 | 5   |
| 10.16 | 7.62  | 4   |
| 7.62  | 5.08  | 3   |
| 5.08  | 2.54  | 2   |
| B     | A     | PIN |

Specifications:

|                       |                    |    |      |    |             |        |    |                                                                                       |  |  |    |           |                                                                                          |    |     |
|-----------------------|--------------------|----|------|----|-------------|--------|----|---------------------------------------------------------------------------------------|--|--|----|-----------|------------------------------------------------------------------------------------------|----|-----|
| Rated Current         | 3A AC,DC (AWG #22) |    |      |    | 角度          | ±3°    | 设计 |  |  |  | 名称 | 2510-立式针座 |                                                                                          |    |     |
| Rated Voltage         | 250V AC,DC         |    |      |    | 63 < L      | ±0.3°  | 审核 |                                                                                       |  |  |    |           | I:  | 页码 | 1/1 |
| Contact Resistance    | 20mΩ max           |    |      |    | 16 < L ≤ 63 | ±0.2°  | 核准 |                                                                                       |  |  |    |           |                                                                                          |    |     |
| Insulation Resistance | 1000MΩ min         |    |      |    | 4 < L ≤ 16  | ±0.1°  | 比例 |                                                                                       |  |  | 型号 | 2510-A    |                                                                                          |    |     |
| Withstanding Voltage  | 800V AC/minute     | 插针 | H65  | 镀锡 | 1 < L ≤ 4   | ±0.05° | 单位 | MM                                                                                    |  |  |    |           |                                                                                          |    |     |
| Temperature Range     | -20℃ to +85℃       | 基座 | PA66 | 白  | L ≤ 1       | ±0.05° | 编号 |                                                                                       |  |  |    |           |                                                                                          |    |     |
| Applicable wire Range | AWG #28 to #22     | 部件 | 材质   | 颜色 | 未详细说明之公差    |        | 版本 | BY/A2019                                                                              |  |  |    |           |                                                                                          |    |     |