

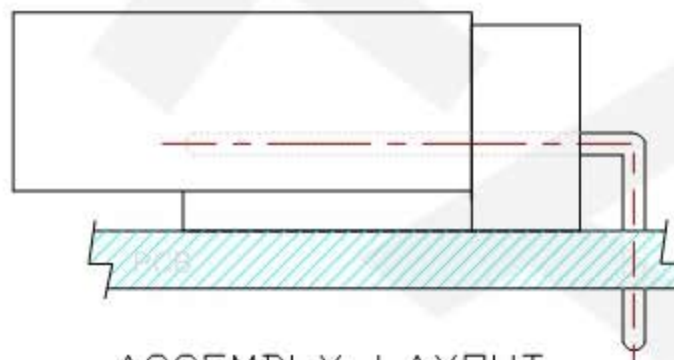


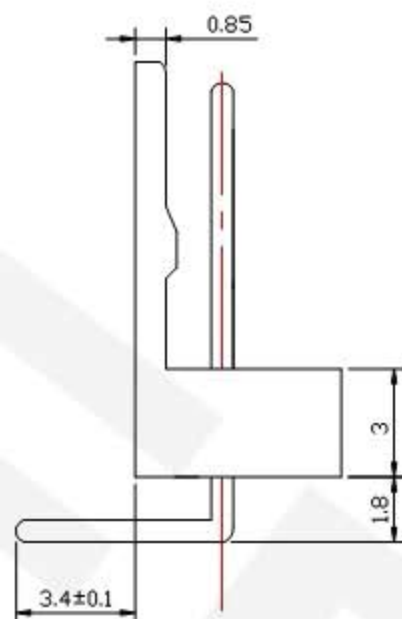


P.C.B LAYOUT

ASSEMBLY LAYOUT



3D View



50.8	48.26	20
25.40	22.86	10
22.86	20.32	9
20.32	17.78	8
17.78	15.24	7
15.24	12.70	6
12.70	10.16	5
10.16	7.62	4
7.62	5.08	3
5.08	2.54	2
B	A	PIN

Specifications:

Rated Current	3A AC,DC (AWG #22)				角度	$\pm 3^{\circ}$					名 称	2510-卧式针座
Rated Voltage	250V AC,DC				$63 < L$	$\pm 0.3^{\circ}$						
Contact Resistance	20m Ω max				$16 < L \leq 63$	$\pm 0.2^{\circ}$						
Insulation Resistance	1000m Ω min				$4 < L \leq 16$	$\pm 0.1^{\circ}$	比 例	1:1	视 图		型 号	2510-AW
Withstanding Voltage	800V AC/minute	插针	H65	镀锡	$1 < L \leq 4$	$\pm 0.05^{\circ}$	单 位	MM	页 码	1/1		
Temperature Range	-20 C to +85 C	基座	PA66	白	$L \leq 1$	$\pm 0.05^{\circ}$	编 号					
Applicable wire Range	AWG #28 to #22	部 件	材 质	颜 色	未详细说明之公差		版 本	BY/A2020				