
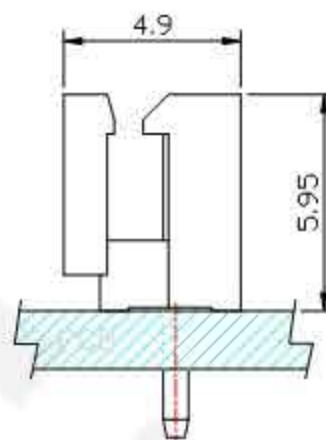


### 3D View

## ASSEMBLY LAYOUT

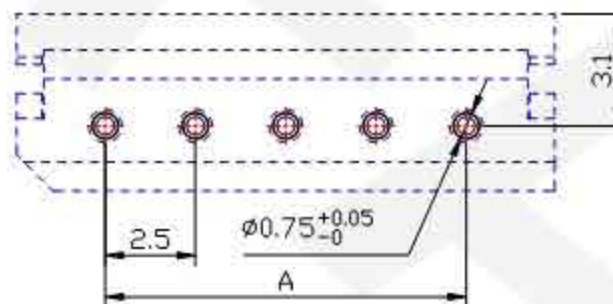

## P.C.B LAYOUT

|      |      |     |
|------|------|-----|
| 52.5 | 47.5 | 20  |
| 27.5 | 22.5 | 10  |
| 25.0 | 20.0 | 9   |
| 22.5 | 17.5 | 8   |
| 20.0 | 15.0 | 7   |
| 17.5 | 12.5 | 6   |
| 15.0 | 10.0 | 5   |
| 12.5 | 7.5  | 4   |
| 10.0 | 5.0  | 3   |
| 7.5  | 2.5  | 2   |
| B    | A    | PIN |

Specifications:

|                       |                    |     |      |     |                  |                  |     |         |     |     |                                                                                       |     |           |
|-----------------------|--------------------|-----|------|-----|------------------|------------------|-----|---------|-----|-----|---------------------------------------------------------------------------------------|-----|-----------|
| Rated Current         | 3A AC,DC (AWG #22) |     |      |     | 角度               | $\pm 3^\circ$    |     | 比例      | 1:1 | 视图  |  | 名 称 | 5264 立式针座 |
| Rated Voltage         | 250V AC, DC        |     |      |     | $63 < L$         | $\pm 0.3^\circ$  |     |         |     |     |                                                                                       |     |           |
| Contact Resistance    | 20mΩ max           |     |      |     | $16 < L \leq 63$ | $\pm 0.2^\circ$  |     |         |     |     |                                                                                       |     |           |
| Insulation Resistance | 1000MΩ min         |     |      |     | $4 < L \leq 16$  | $\pm 0.1^\circ$  |     |         |     |     |                                                                                       | 型 号 | 5264-A    |
| Withstanding Voltage  | 1000V AC/minute    | 插针  | H65  | 镀锡  | $1 < L \leq 4$   | $\pm 0.05^\circ$ | 单 位 | MM      | 页 码 | 1/1 |                                                                                       |     |           |
| Temperature Range     | -40 C to +85 C     | 基座  | PA66 | 白   | $L \leq 1$       | $\pm 0.05^\circ$ | 编 号 |         |     |     |                                                                                       |     |           |
| Applicable wire Range | AWG #28 to #22     | 部 件 | 材 质  | 颜 色 | 未详细说明之公差         |                  | 版 本 | BY/2020 |     |     |                                                                                       |     |           |