
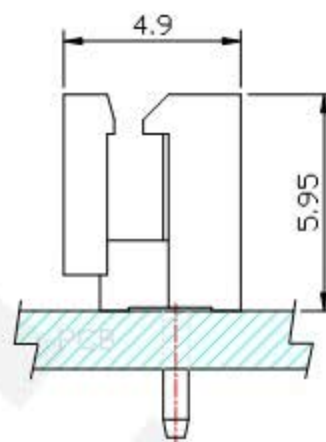


3D View

ASSEMBLY LAYOUT

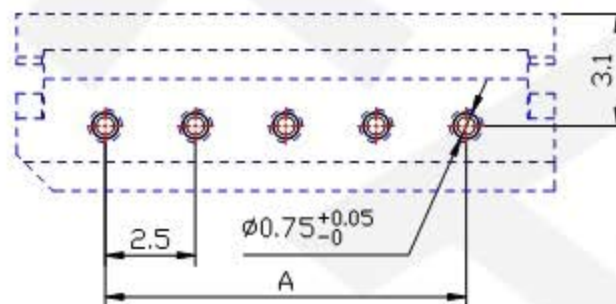

P.C.B LAYOUT

52.5	47.5	20
47.5	42.5	10
42.5	37.5	9
37.5	32.5	8
32.5	27.5	7
27.5	22.5	6
22.5	17.5	5
17.5	12.5	4
12.5	7.5	3
7.5	2.5	2
B	A	PIN

Specifications:

Rated Current	3A AC,DC (AWG #22)				角度	$\pm 3^{\circ}$					名 称	5264 立式针座	
Rated Voltage	250V AC,DC				$63 < L$	$\pm 0.3^{\circ}$							
Contact Resistance	20m Ω max				$16 < L \leq 63$	$\pm 0.2^{\circ}$							
Insulation Resistance	1000M Ω min				$4 < L \leq 16$	$\pm 0.1^{\circ}$	比 例	1:1	视 图				型 号
Withstanding Voltage	1000V AC/minute	插针	H65	镀锡	$1 < L \leq 4$	$\pm 0.05^{\circ}$	单 位	MM	页 码	1/1			
Temperature Range	-40 C to +85 C	基座	PA66	白	$L \leq 1$	$\pm 0.05^{\circ}$	编 号						
Applicable wire Range	AWG #28 to #22	部 件	材 质	颜 色	未详细说明之公差		版 本	BY/2020					