
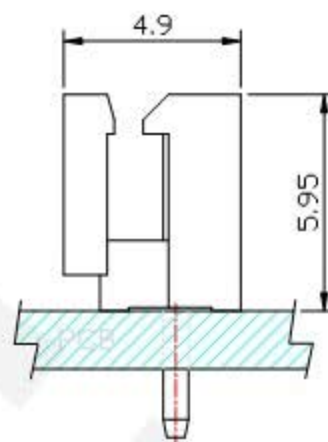


3D View

ASSEMBLY LAYOUT

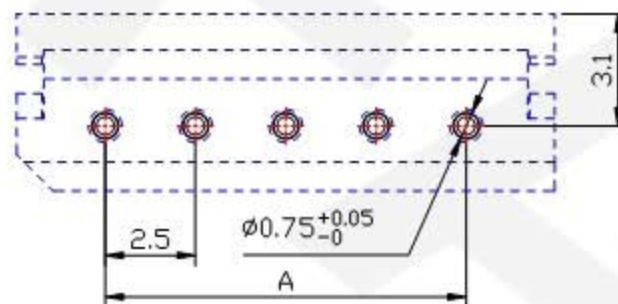

P.C.B LAYOUT

52.5	47.5	20
27.5	22.5	10
25.0	20.0	9
22.5	17.5	8
20.0	15.0	7
17.5	12.5	6
15.0	10.0	5
12.5	7.5	4
10.0	5.0	3
7.5	2.5	2
B	A	PIN

Specifications:

Rated Current	3A AC,DC (AWG #22)				角度	$\pm 3^\circ$		比例	1:1	视图		名 称	5264 立式针座
Rated Voltage	250V AC, DC				$63 < L$	$\pm 0.3^\circ$							
Contact Resistance	20mΩ max				$16 < L \leq 63$	$\pm 0.2^\circ$							
Insulation Resistance	1000MΩ min				$4 < L \leq 16$	$\pm 0.1^\circ$						型 号	5264-A
Withstanding Voltage	1000V AC/minute	插针	H65	镀锡	$1 < L \leq 4$	$\pm 0.05^\circ$	单 位	MM	页 码	1/1			
Temperature Range	-40 C to +85 C	底座	PA66	白	$L \leq 1$	$\pm 0.05^\circ$	编 号						
Applicable wire Range	AWG #28 to #22	部 件	材 质	颜 色	未详细说明之公差		版 本	BY/2020					