

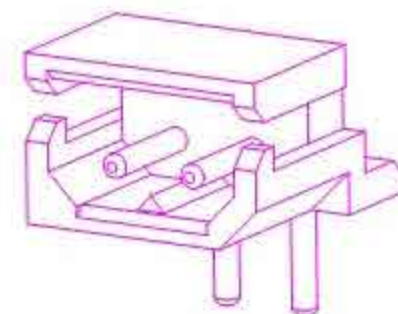
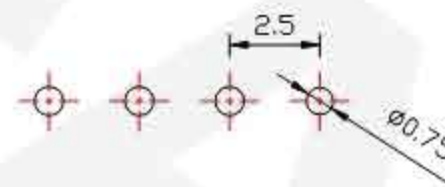
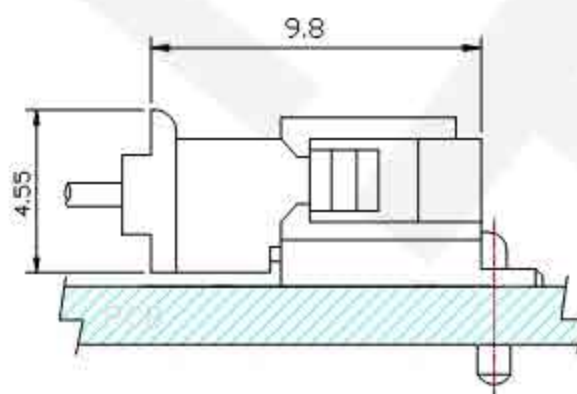
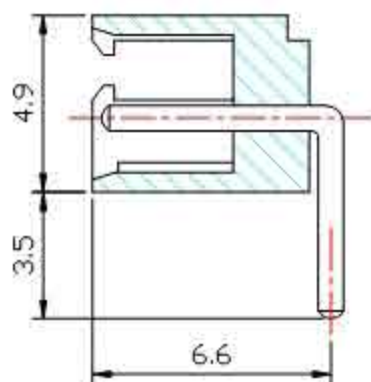


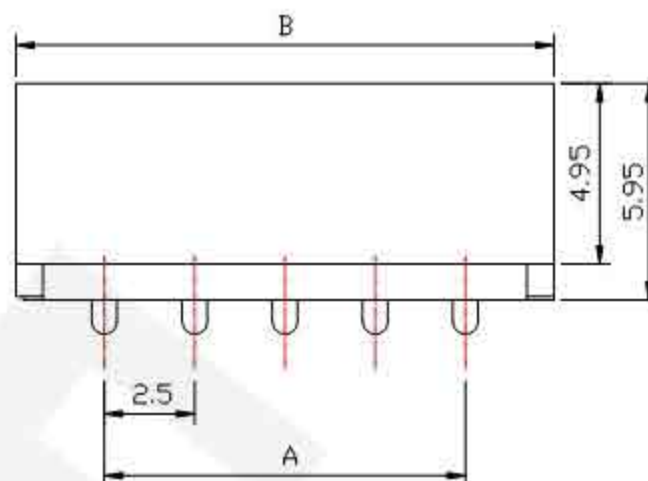

3D View

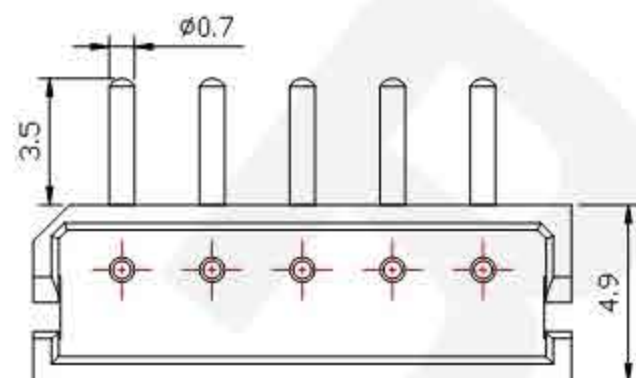

SECTIONAL DRAWING

ASSEMBLY LAYOUT

P.C.B LAYOUT

52.5	47.5	20
27.5	22.5	10
25.0	20.0	9
22.5	17.5	8
20.0	15.0	7
17.5	12.5	6
15.0	10.0	5
12.5	7.5	4
10.0	5.0	3
7.5	2.5	2
B	A	PIN

Specifications:

Rated Current	3A AC,DC (AWG #22)				角度	$\pm 3^\circ$					名称	5264 卧式针座
Rated Voltage	250V AC, DC				$63 < L$	$\pm 0.3^\circ$						
Contact Resistance	20m Ω max				$16 < L \leq 63$	$\pm 0.2^\circ$						
Insulation Resistance	1000M Ω min				$4 < L \leq 16$	$\pm 0.1^\circ$	比例	1:1	视图		型号	5264-AW
Withstanding Voltage	1000V AC/minute	插针	H65	镀锡	$1 < L \leq 4$	$\pm 0.05^\circ$	单位	MM	页码	1/1		
Temperature Range	-40 C to +85 C	基座	PA66	白	$L \leq 1$	$\pm 0.05^\circ$	编号					
Applicable wire Range	AWG #28 to #22	部件	材质	颜色	未详细说明之公差		版本	BY/2020				