
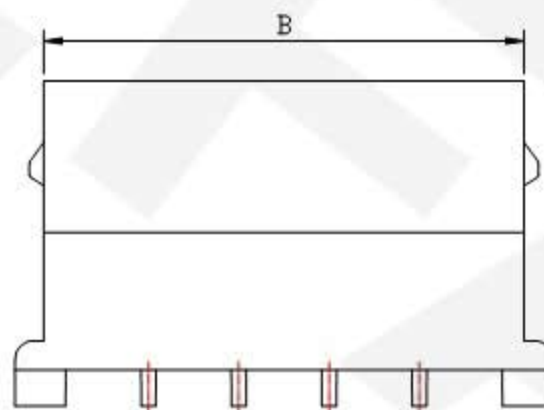
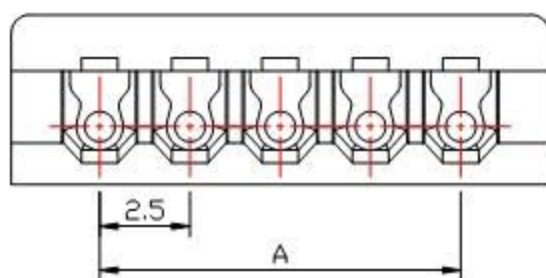
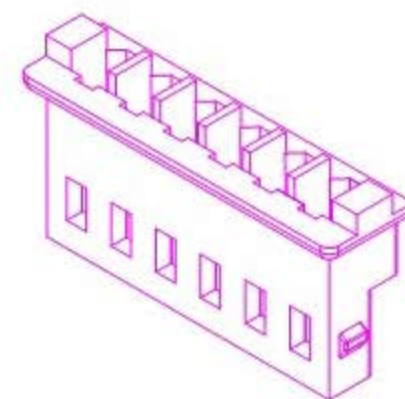
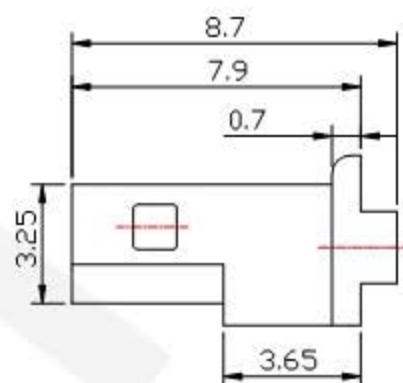


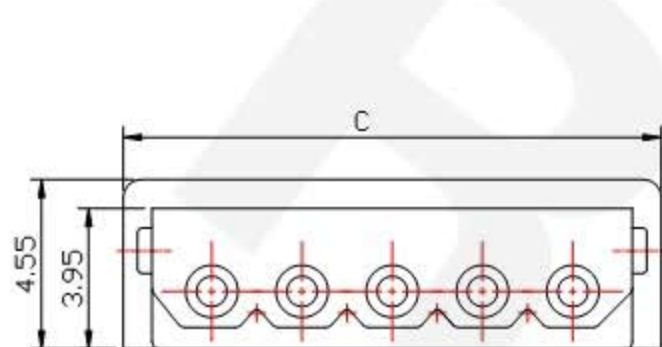

3D View

52.5	50.8	47.5	20
27.5	25.8	22.5	10
25.0	23.3	20.0	9
22.5	20.8	17.5	8
20.0	18.3	15.0	7
17.5	15.8	12.5	6
15.0	13.3	10.0	5
12.5	10.5	7.5	4
10.0	8.3	5.0	3
7.5	5.8	2.5	2
C	B	A	PIN

Specifications:

Rated Current	3A AC,DC (AWG #22)			角度	$\pm 3^\circ$		比例	1:1	视图		名称	5264 胶壳
Rated Voltage	250V AC, DC			$63 < L$	$\pm 0.3^\circ$							
Contact Resistance	20mΩ max			$16 < L \leq 63$	$\pm 0.2^\circ$							
Insulation Resistance	1000MΩ min			$4 < L \leq 16$	$\pm 0.1^\circ$	单位	MM	页码	1/1	型号	5264-Y	
Withstanding Voltage	1000V AC/minute			$1 < L \leq 4$	$\pm 0.05^\circ$	编号						
Temperature Range	-40 C to +85 C	胶壳	PA66	白	$L \leq 1$	版本	BY/2020					
Applicable wire Range	AWG #28 to #22	部件	材质	颜色	未详细说明之公差							