

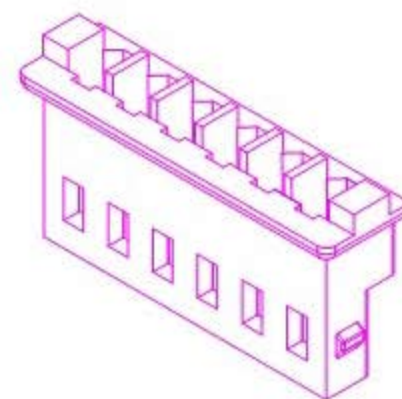
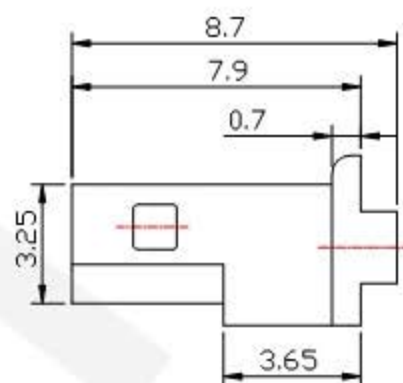
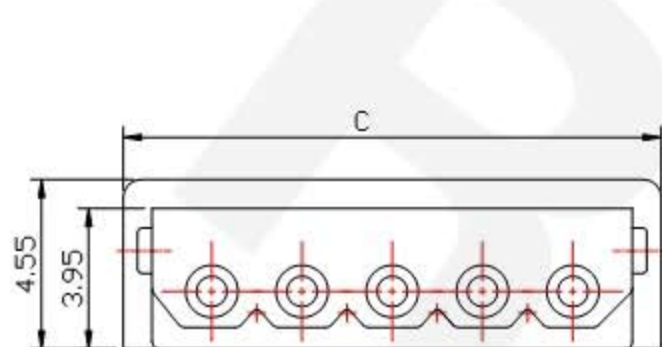


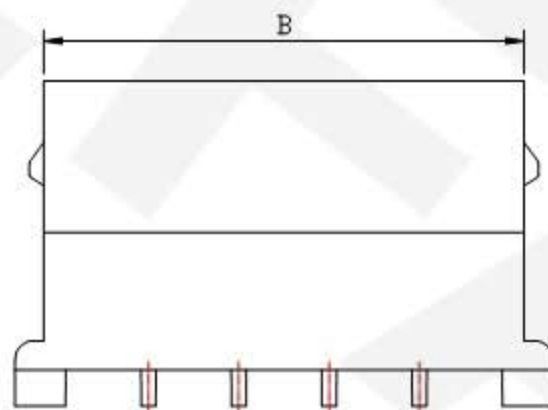

3D View

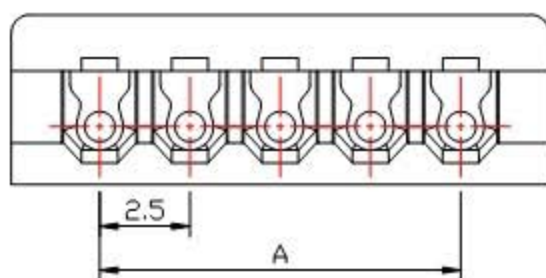

52.5	50.8	47.5	20
...	...	...	...
27.5	25.8	22.5	10
25.0	23.3	20.0	9
22.5	20.8	17.5	8
20.0	18.3	15.0	7
17.5	15.8	12.5	6
15.0	13.3	10.0	5
12.5	10.5	7.5	4
10.0	8.3	5.0	3
7.5	5.8	2.5	2
C	B	A	PIN

Specifications:

Rated Current	3A AC, DC (AWG #22)				角度	±3°	比例 1:1 视图 1/1 名称 5264 胶壳 型号 5264-Y
Rated Voltage	250V AC, DC				63 < L	±0.3°	
Contact Resistance	20mΩ max				16 < L ≤ 63	±0.2°	
Insulation Resistance	1000MΩ min				4 < L ≤ 16	±0.1°	
Withstanding Voltage	1000V AC/minute				1 < L ≤ 4	±0.05°	
Temperature Range	-40 C to +85 C	胶壳	PA66	白	L ≤ 1	±0.05°	单位 M M 页码 1/1
Applicable wire Range	AWG #28 to #22	部件	材质	颜色	未详细说明之公差	版本号	BY/2020