

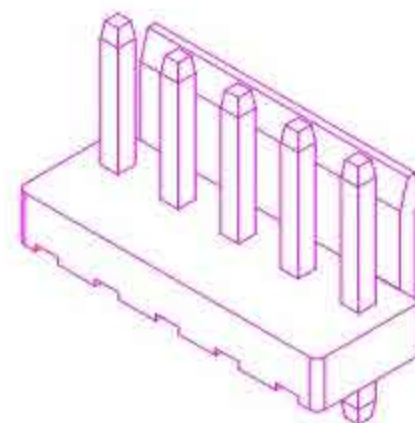


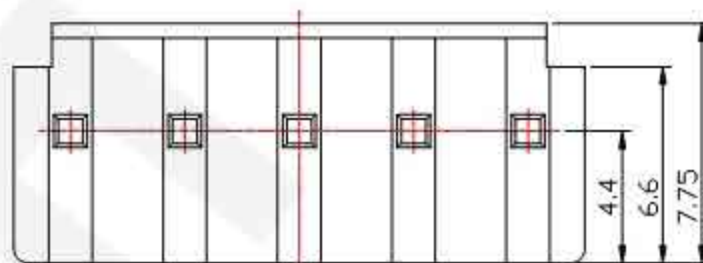

3D View

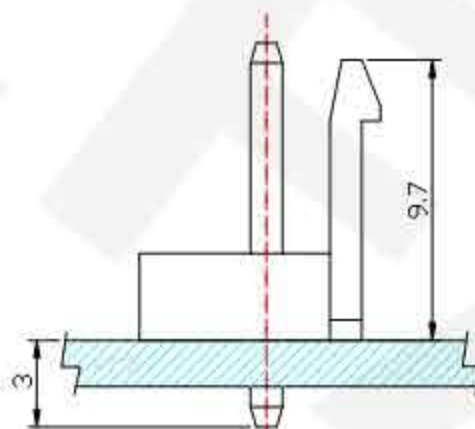

P.C.B LAYOUT

ASSEMBLY LAYOUT

63.36	59.40	16
39.60	35.64	10
35.64	31.68	9
31.68	27.72	8
27.72	23.76	7
23.76	19.80	6
19.80	15.84	5
15.84	11.88	4
11.88	7.92	3
7.92	3.96	2
B	A	PIN

Specifications:

Rated Current	7A AC,DC (AWG #18)				角度	$\pm 3^\circ$	设计		名称	VH 立式针座			
Rated Voltage	250V AC,DC				$63 < L$	$\pm 0.3^\circ$	审核						
Contact Resistance	20mΩ max				$16 < L \leq 63$	$\pm 0.2^\circ$	核准						
Insulation Resistance	1000MΩ min				$4 < L \leq 16$	$\pm 0.1^\circ$	比例				1:1	视图	1/1
Withstanding Voltage	1500V AC/minute	插针	H65	镀锡	$1 < L \leq 4$	$\pm 0.05^\circ$	单位				MM	页码	
Temperature Range	-25°C to +85°C	基座	PA66	白	$L \leq 1$	$\pm 0.05^\circ$	编号		型号	VH-A			
Applicable wire Range	AWG #22 to #18	部件	材质	颜色	未详细说明之公差	版本	BY/A2020						