
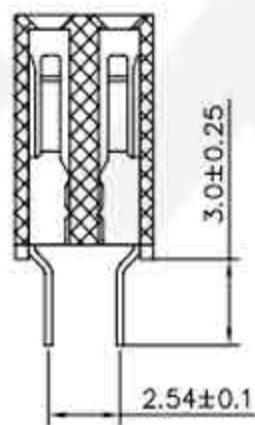


RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ± 0.05 (TOP VIEW)

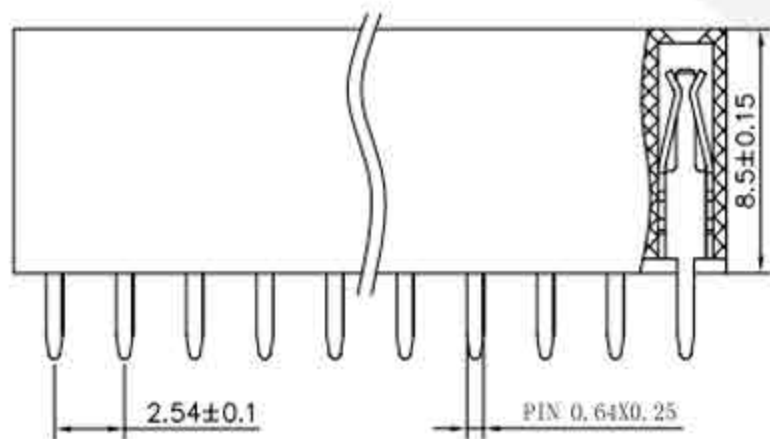

SPECIFICATIONS

Current Rating:	3Amps
Insulation Resistance:	1000M Ω Min
Contact Resistance:	20m Ω Max
Withstanding Voltage:	AC 1000V
Operation Temperature:	-40° to +105°
Contact Material:	Brass
Standard:	PBT
Insulator Material:	Polyester (UL 94V-0)
Contact Plating:	Gold Flash
Max. Processing Temp:	200° C for 30-60 seconds (220° C for 5 seconds)

- (1) Pin Spacing: 254=2.54mm
- (2) Product Name: FH=Female Header
- (3) No. of Rows: 1=Single Row ; 2=Dual Row
- (4) No. of Pins Per Row: 1~40
- (5) Insulator Material Height: 50=5.0mm; 85=8.5mm
- (6) Connector Type: S=Straight; R=Right Angle; M=SMT
- (7) Connector Material Length: 30=3.0mm; 32=3.2mm
- (8) Insulator Material Width: 50=5.0mm; 55=5.5mm
- (9) Contact Plating: G0=Gold Flash; AU15=Au 1.5 μ "
- (10) Connector Material Type: U=U Type; Y=Y Type
- (11) Insulator Material Option:
A=BK-PBT; B=BK-PA6T; C=BK-PA46; D=KB-LCP; S=Special