


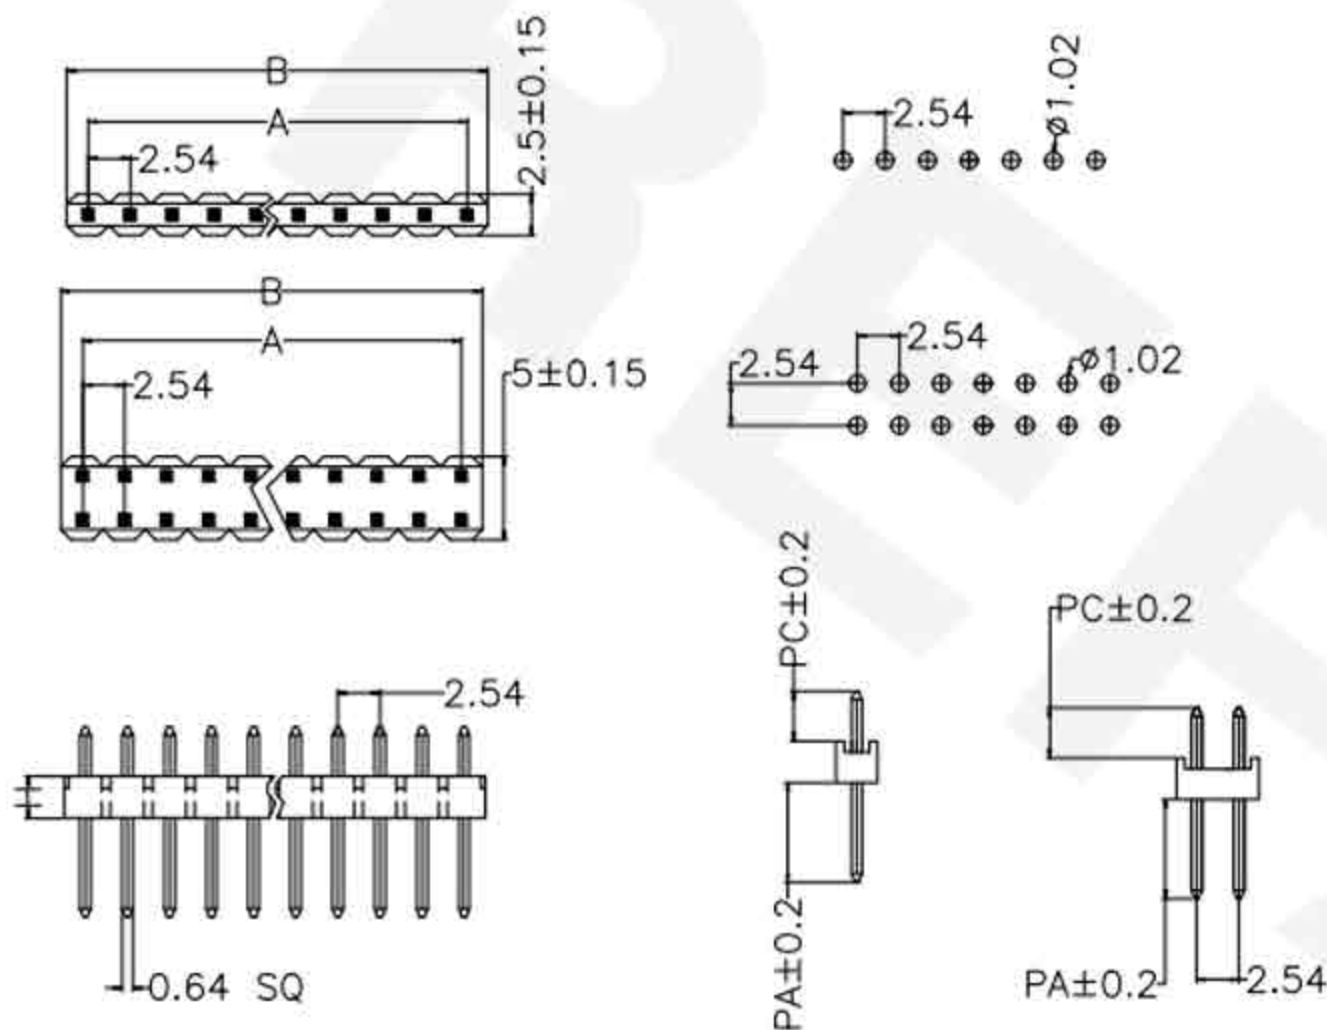

SPECIFICATIONS

Current Rating: 3Amps

Insulation Resistance: 1000M Ω min

Withstanding Voltage: 1000VAC

Contact Resistance: 20m Ω max

Operating Temperature: -40° C to +105° C

Standard: PBT

Contact Material: Brass

Contact Plating: Au or Sn Over Ni

Max. Processing Temp: 180° C for 30-60 second
(200° C for 10 second)

(1) Pin Spacing: 254=2.54mm

(2) Product Name: PH=Pin Header

(3) No. of Rows: 1=Single; 2=Dual Row; 3=Triplex Row

(4) No. of Pins Per Row: 1-40

(5) Insulator Material

Height: 100=1mm; 150=1.5mm; 200=2.0mm; 254=2.54mm

(6) Contact Type: S=Straight; R=Right/Angle; N=SMT

(7) Contact Material

Length: 112=11.2mm; 115=11.5mm; 138=13.8mm

(8) Contact Plating: SN=Tin; GO=12Y, 14Y, 18Y, 20Y, 25Y, 30Y, 35Y; SO=Gold Flash/Tin

(9) Insulator Material Option:

A=BK-PBT; B=BK-PA67; C=BK-PA46; D=BK-LCP; S=Special