
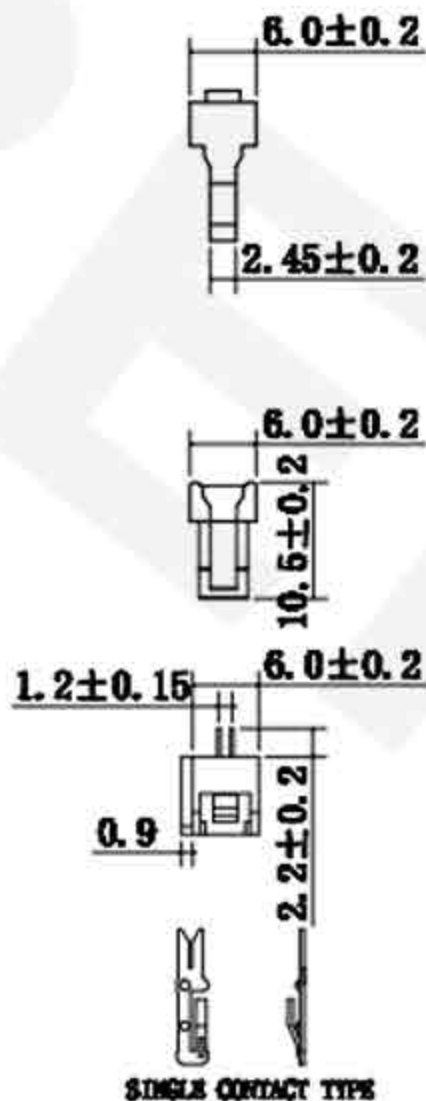


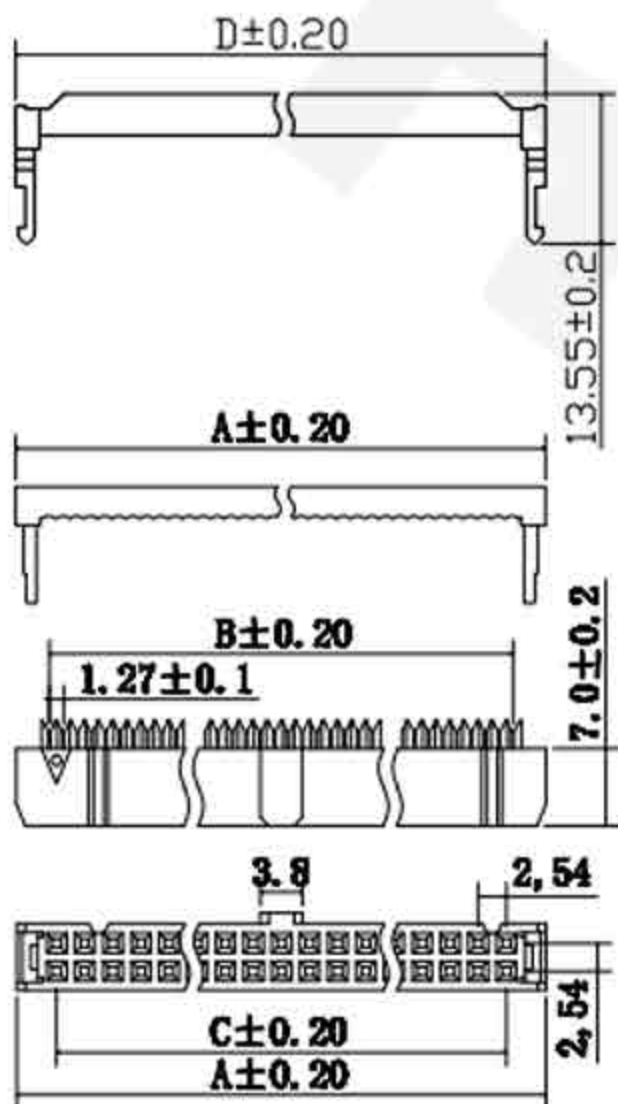

SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ min
Withstanding Voltage: 1000VAC
Contact Resistance: 20mΩ max
Operating Temperature: -40° C to +105° C
Standard: PBT
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Max. Processing Temp: 180° C for 30-60 second
(200° C for 10 second)

- (1) Pin Spacing: 254=2.54mm
- (2) Product Name: BH=Box Header
- (3) No. of Pins Per Row: 6-64
- (4) Insulator Material Option:
A=HK-PBT; B=HK-PA6T; C=HK-PA46; D=HK-LCP; S=Special
- (5) B=Black, W=White, G=Gray, Y=Yellow