


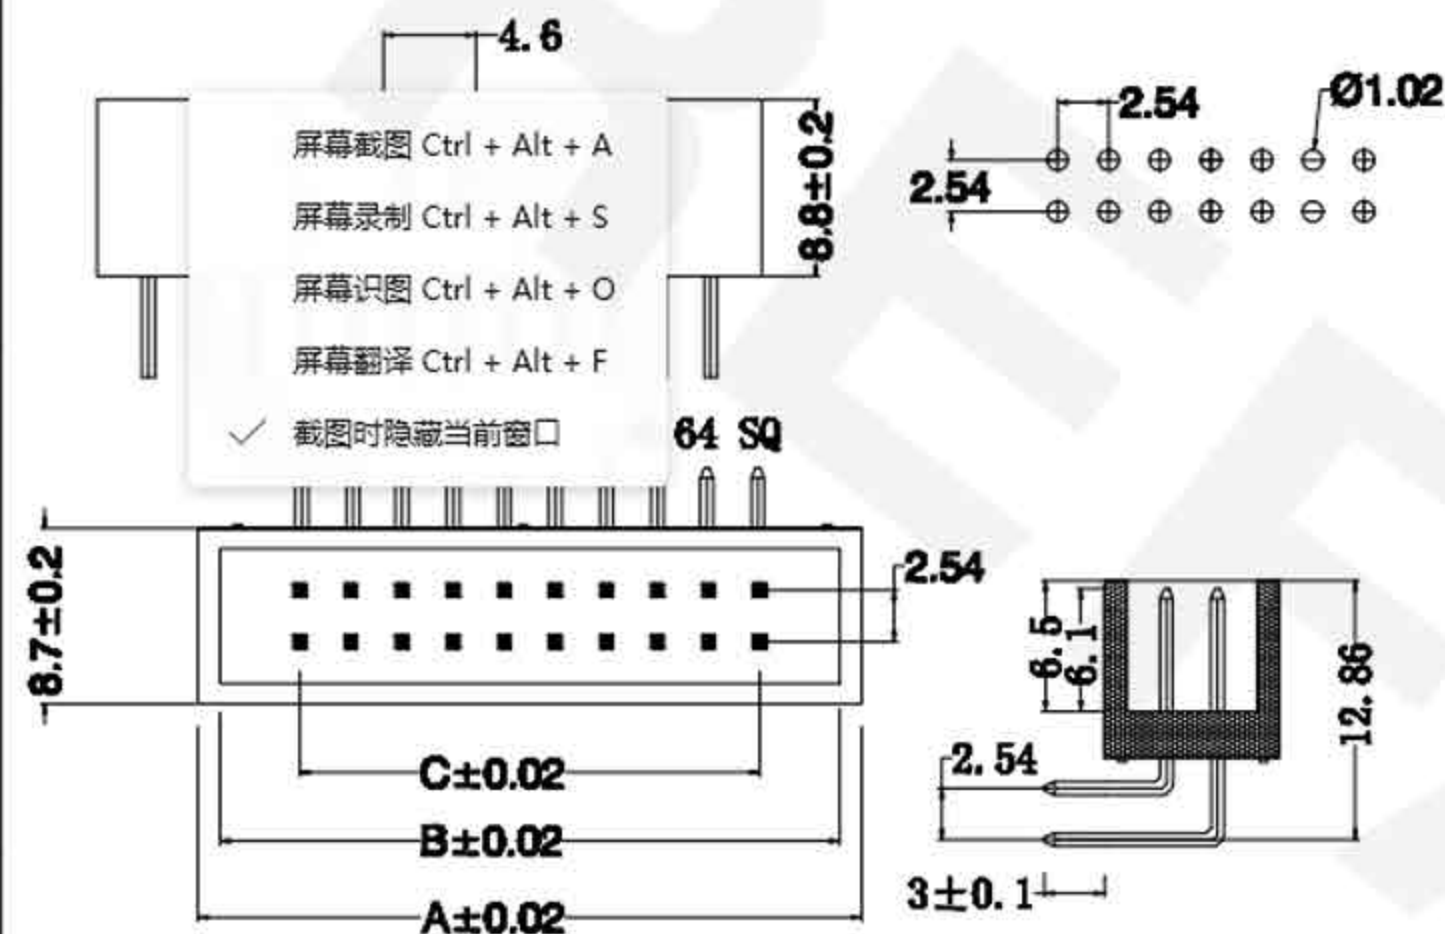

SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ min
Withstanding Voltage: 1000VAC
Contact Resistance: 20mΩ max
Operating Temperature: -40° C to +105° C
Standard: PBT
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Max. Processing Temp: 180 °C for 30-60 second
(200 °C for 10 second)

- (1) Pin Spacing: 254=2.54mm
- (2) Product Name: BP-Box Header
- (3) No. of Pins Per Row: 6-64
- (4) Insulator Material Height: 88-8.8mm
- (5) Contact Type: S=Straight; R=Right/Angle; N=SWT
- (6) Contact Plating: SN=Tin; GO=Gold Flash; SO=Gold Flash/Tin; AU08=Au0.8u''
- (7) Insulator Material Option:
A=EK-PBT; B=EK-PA6T; C=EK-PA46; D=EK-LCP; S=Special