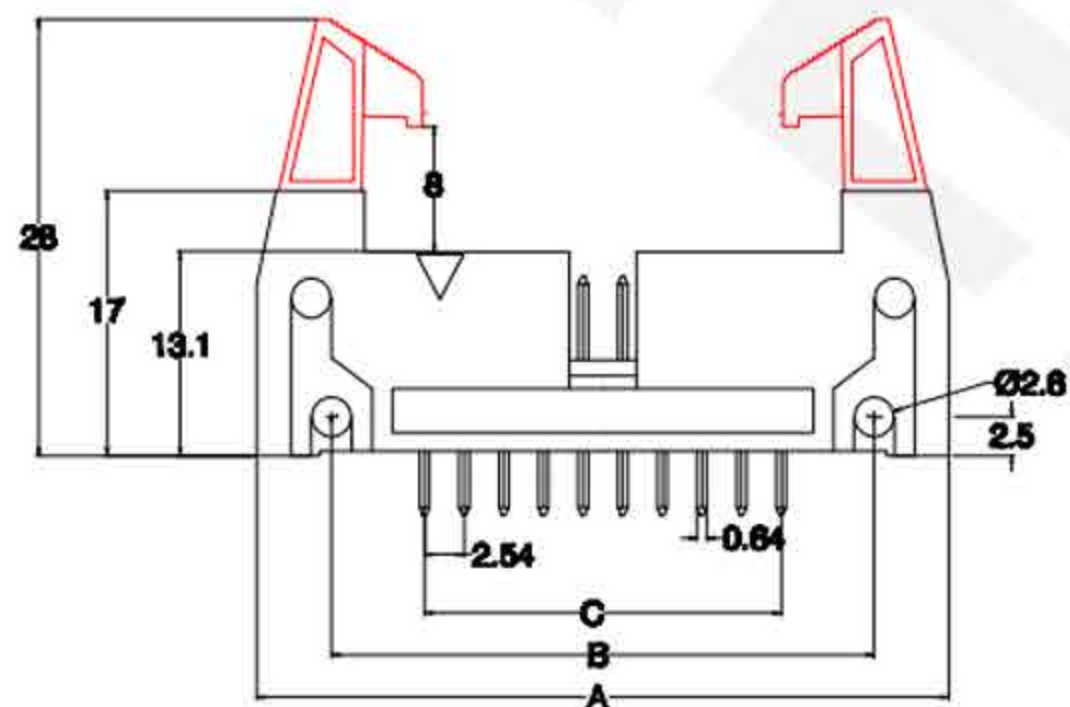
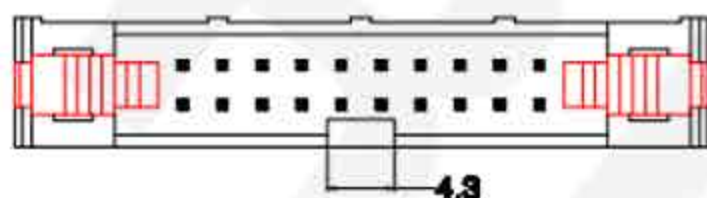


SPECIFICATIONS

Current Rating: 34amps

Insulation Resistance: 1000M Ω min

Withstanding Voltage: 1000VAC

Contact Resistance: 20mΩ max

Operating Temperature: -40° C to +105° C

Standard: PBT

Contact Material: Brass

Contact Plating: Au or Sn Over Ni

Max. Processing Temp: 180 °C for 30-60 second
(280 °C for 10 second)

- (1) Pin Spacing: 254-2.54mm
(2) Product Name: BH=Box Header
(3) No. of Pins Per Row: 6-64
(4) Contact Type: S=Straight; R=Right/Angle; M=SWT
(5) Contact Plating: SN=Tin; 60=Gold Flash; SO=Gold Flash/Tin; AUCS=Au. Sn''
(6) Insulator Material Option:
A=BK-PBT; B=BK-PA6T; C=BK-PA46; D=BK-LCP; S=Special