
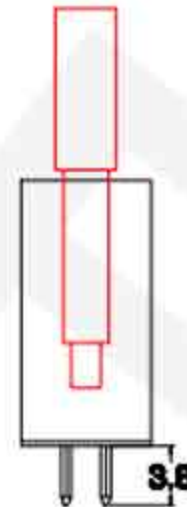


SPECIFICATIONS

Current Rating: 3Amps
 Insulation Resistance: 1000M Ω min
 Withstanding Voltage: 1000VAC
 Contact Resistance: 20m Ω max
 Operating Temperature: -40° C to +105° C
 Standard: PBT
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Max. Processing Temp: 180 °C for 30-60 second
 (200 °C for 10 second)

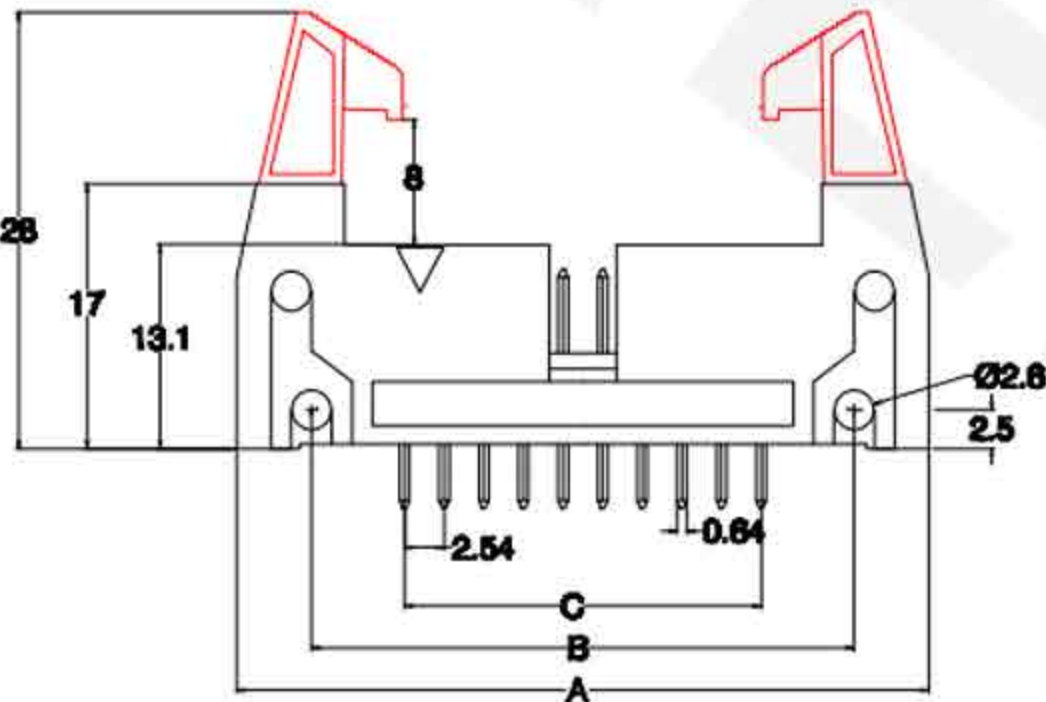

- (1) Pin Spacing: 254=2.54mm
- (2) Product Name: BH=Box Header
- (3) No. of Pins Per Row: 6-64
- (4) Contact Type: S=Straight; R=Right/Angle; M=SWT
- (5) Contact Plating: SN=Tin; GO=Gold Flash; SO=Gold Flash/Tin; AUSD=Au/Sn; Au'
- (6) Insulator Material Option:
 A=BE-PBT; B=BE-PA6T; C=BE-PA46; D=BE-LCP; S=Special