
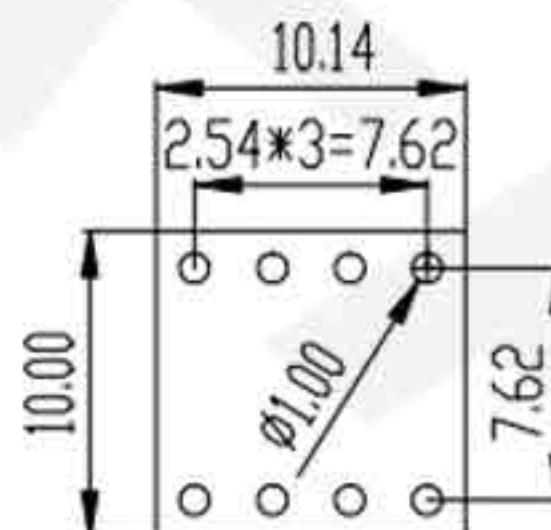
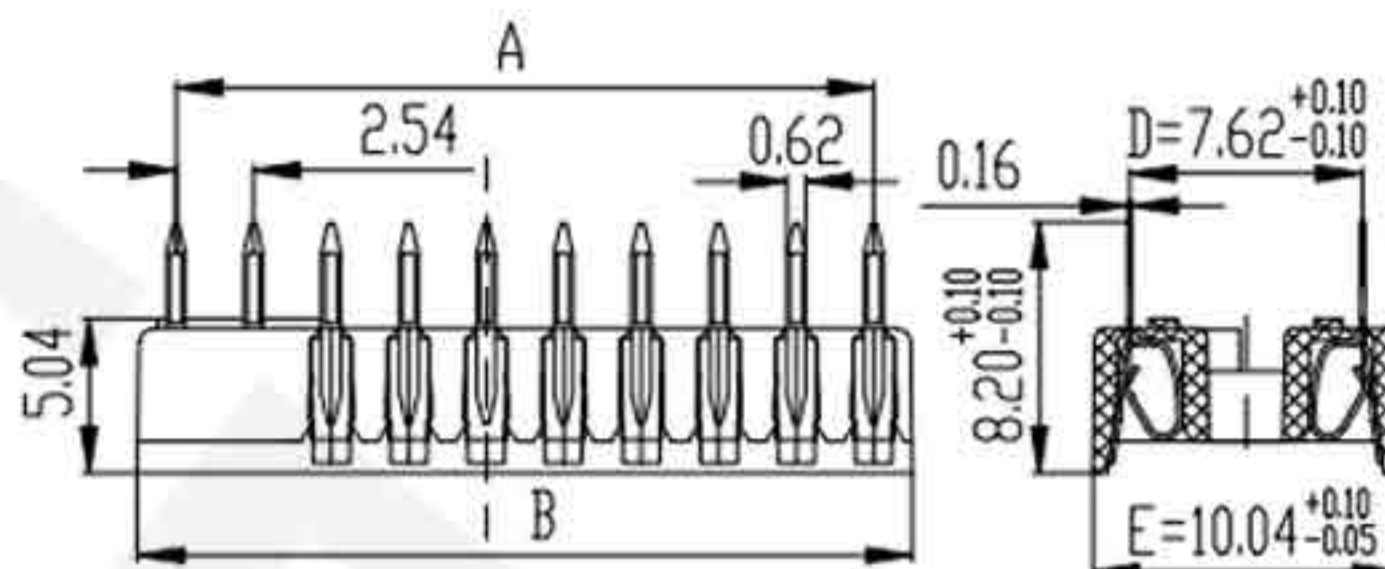


Contact Resistance: 20 mΩ Max
Insulator Resistance: 1000 mΩ Min
Rated Current: 1 Amp/P
Withstand Voltage: 1000VAC60S
Contact: phosphor bronze
Housing: PBT&20% GlassFiber

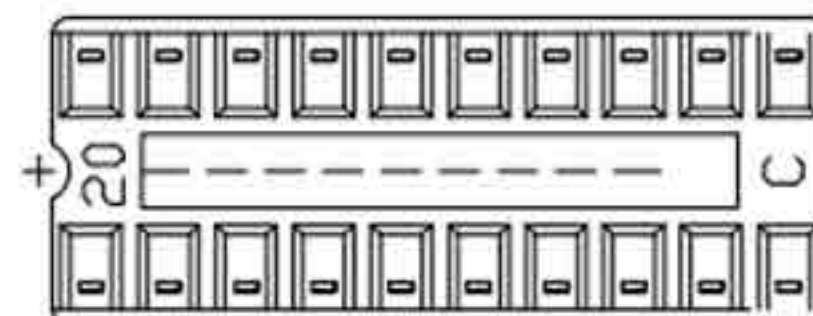

PCB LAYOUT

Position	A	B	C	D	E
6	5.08 ^{+0.00} / _{-0.05}	7.62 ^{+0.00} / _{-0.05}	8.20 ^{+0.10} / _{-0.10}	7.62 ^{+0.10} / _{-0.10}	10.04 ^{+0.10} / _{-0.05}
8	7.62 ^{+0.00} / _{-0.05}	10.16 ^{+0.00} / _{-0.05}			
14	15.24 ^{+0.00} / _{-0.05}	17.78 ^{+0.00} / _{-0.05}			
16	17.78 ^{+0.00} / _{-0.05}	20.32 ^{+0.00} / _{-0.05}			
18	20.32 ^{+0.00} / _{-0.05}	22.86 ^{+0.00} / _{-0.05}			
20	22.86 ^{+0.00} / _{-0.05}	25.40 ^{+0.00} / _{-0.05}			
24	27.94 ^{+0.00} / _{-0.05}	30.48 ^{+0.00} / _{-0.05}			
28	33.02 ^{+0.00} / _{-0.05}	35.56 ^{+0.00} / _{-0.05}			
32	38.10 ^{+0.00} / _{-0.05}	40.64 ^{+0.00} / _{-0.05}			