


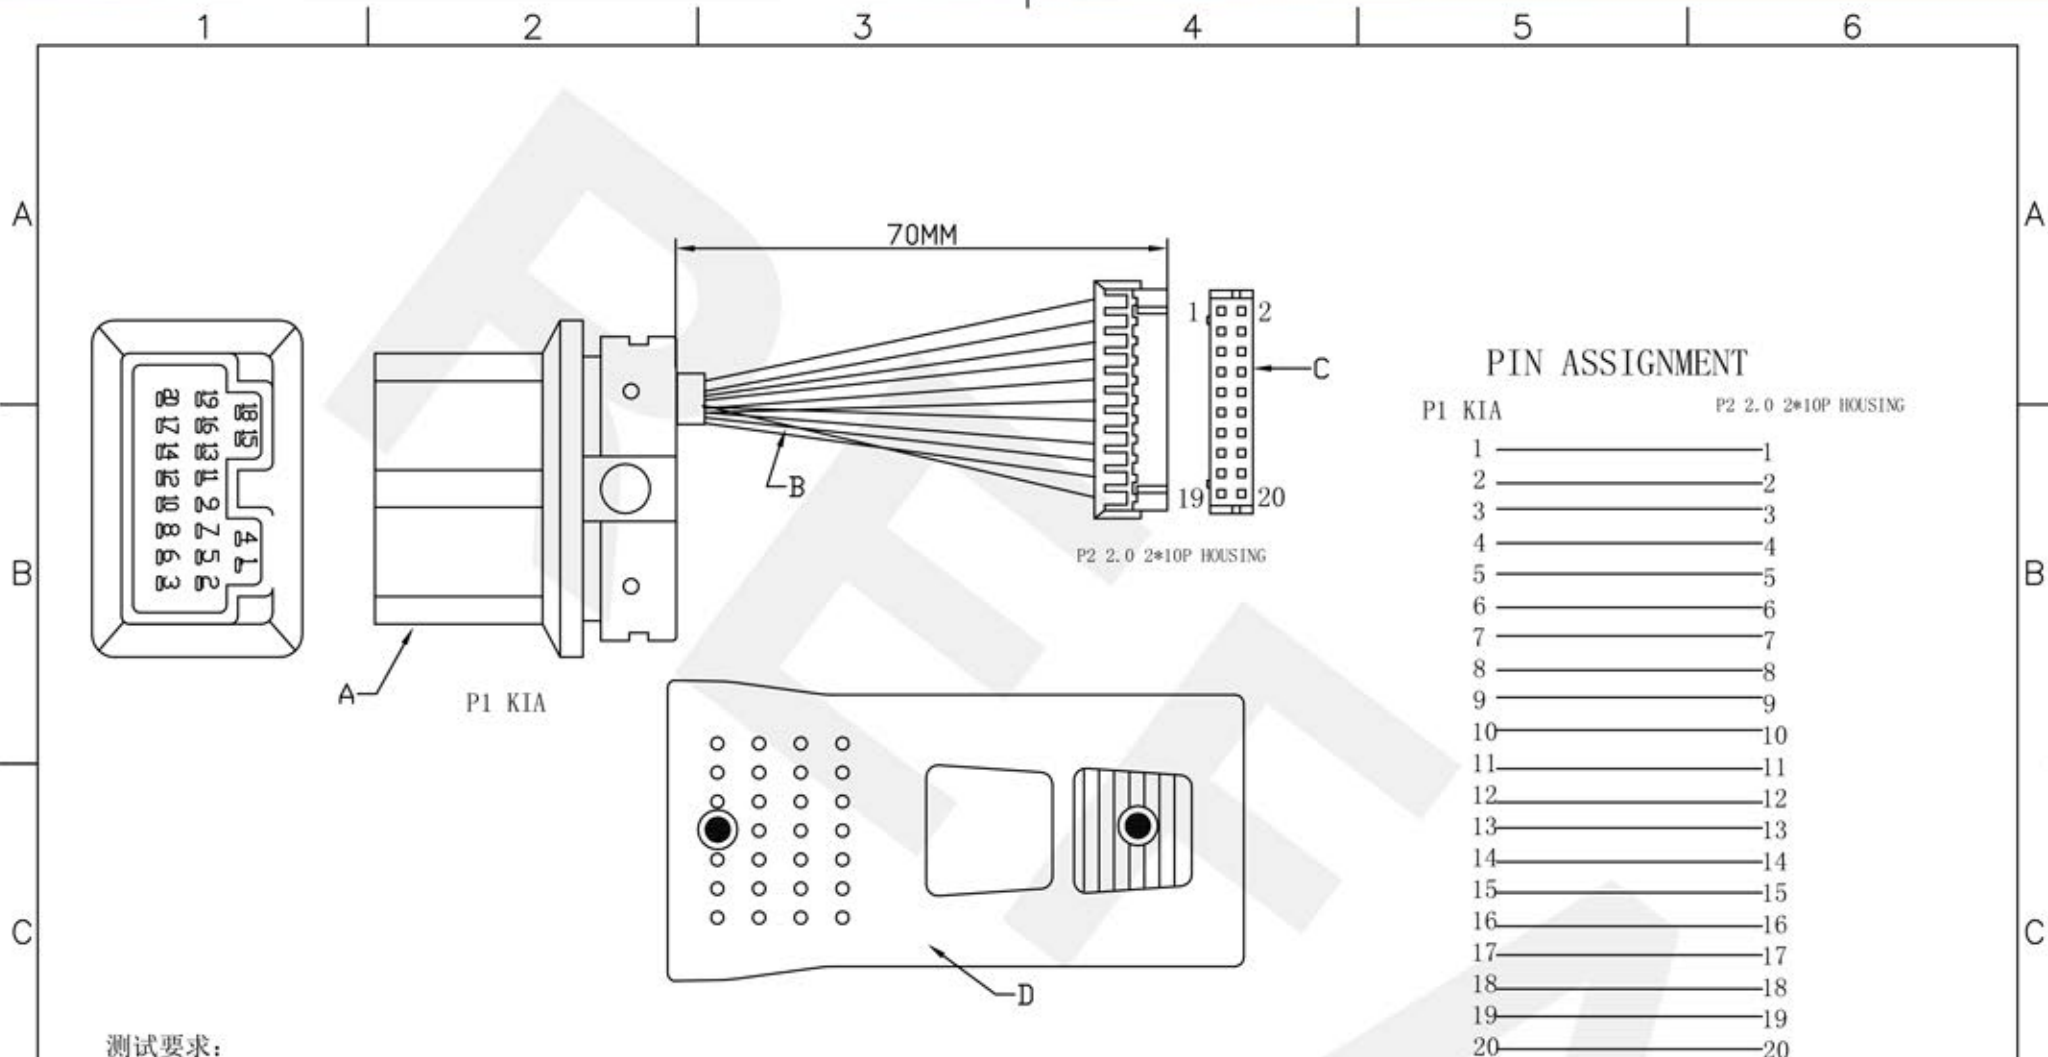

测试要求:

1. 100%测试OK: 不能有短路。错位。断线。绝缘不良
2. 导通阻抗: 5 OHM
3. 绝缘阻抗: 5M OHM
4. 高压: 300V DC

ROHS

D	黑色外壳 (LC020)表面喷橡胶油 尾部封闭+螺丝	1	SET	纸箱: 46.5*31.5*32.5CM /A3B
C	白色 2.0 2*10P HOUSING+2.0端子 磷铜	1	SET	
B	CABLE:OD=6.8 20C 26AWG BLACK	140	MM	
A	KIA 20P PCB板+4号扁针 0.6厚*20PCS 磷铜	1	SET	
ITEM	BILL OF MATERIAL /SPECIFICATION	QTY	UNIT	包装材料清单

QUALITY SYMBOLS					
▽0 ▽0	GENERAL TOLERANCES	PRODUCT NAME			
	X _L ±0.1		KIA -20P HOUSING		
	X _S ±0.2				
	X _M ±0.5				
	X _L ±1.0				
	ANGLE TOLERANCES	DATE: 2017/06/01	UNIT: MM	SHEET: 1/1	
	R _e ±0.1				
	R _s ±0.2				
	R _M ±0.5				
	R _L ±1.0				
THIRD ANGLE PROJECTION					