
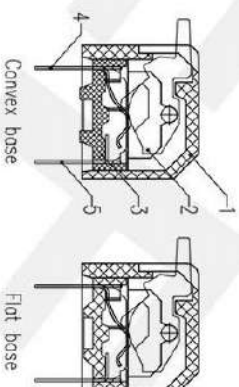
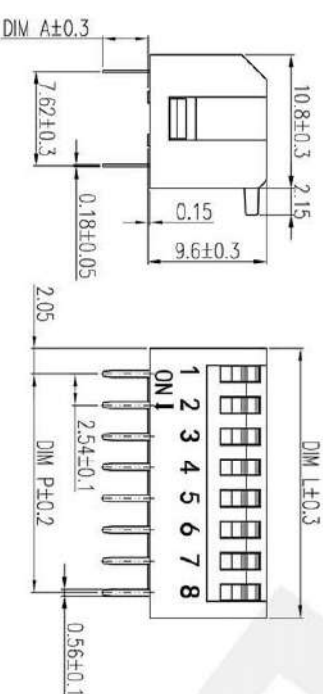
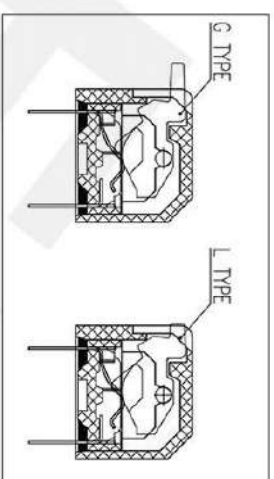


DIM A	Long Pin
Convex base	3.65
Flat base	3.80



SPECIFICATION:

1. Rating:
Switching: 25mA 24VDC
Non-Switching: 100mA 50VDC
2. Contact Resistance:
Initial: 50mΩmax
After Life Test: 100mΩ max
3. Insulation Resistance: 100MΩ min/ 500 VDC
4. Withstand Voltage: 500VAC for 1 minute
5. Operation Force: 1000g max
6. Mechanical Lifetime: 2000 cycles
7. Operation Temperature: -40°C ~ +85°C
8. Storage Temperature: -40°C ~ +85°C
9. RoHS Compliance

SOLDERING INFORMATION:
Manual Soldering: 30W iron, 320±5°C, 3S max
Wave Soldering: 250±10°C, 5S max
Keep in "off" position during soldering

DIM		POLES		DIM P		DIM L		ITEM		NAME OF PART		NO. OF PART		QTY		MATERIAL		NOTE	
5	Pin2		XX		P	Copper Alloy		Gold Plated											
4	Pin1		XX		P	Copper Alloy		Gold Plated											
3	Base		XX		1	Thermoplastic		UL94V-0											
2	Actuator		XX		P	Thermoplastic		UL94V-0											
1	Housing		XX		1	Thermoplastic		UL94V-0											
7																			
6																			
5																			
4																			
3																			
2																			
1																			

SCHEMATIC

(1,2,3,4,.....1,1,2POS AVAIL)

DATE: 2020.6.5
 NAME:
 DWGNO.: W20004302

REV	ECN	CONTENT	CHECK	DATE
VO.0		ORIGINAL	LJ	2019.01.11
V1.0		arrange the drawing	WL	2020.06.01

